



TM

VITAL

Electrocomp




Google Us : Vital Connectors

Manufacturer of PCB Terminal Blocks, Fuse Holders, Barrier Terminals, & Switches

Pluggable Connectors



Series PFT H-5.00/5.08

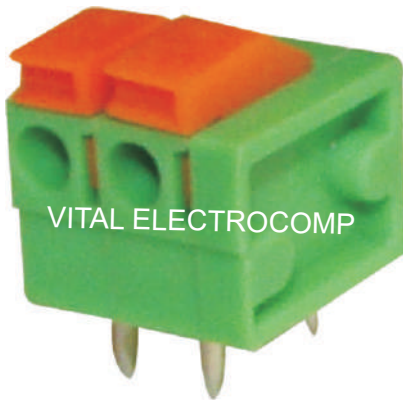

Picture shows 2 pole version of the product

TECHNICAL SPECIFICATIONS :

Pitch	: 5.00 mm x 7.62 mm or 5.08 mm x 7.62 mm
Nominal Rating	: 10A/250V
Dielectric Strength	: >2 kV
Moulded Material	: Polyamide (Nylon)66 - UL94 V0 or V2
Insulation Resistance	: >1000 M Ω @ 500 Vdc
Terminal	: Tin Plated Copper Alloy
Spring	: Stainless Steel 300 Series Grade
Wire Size	: 1.5 mm ²
Push Force Required	: 10 N

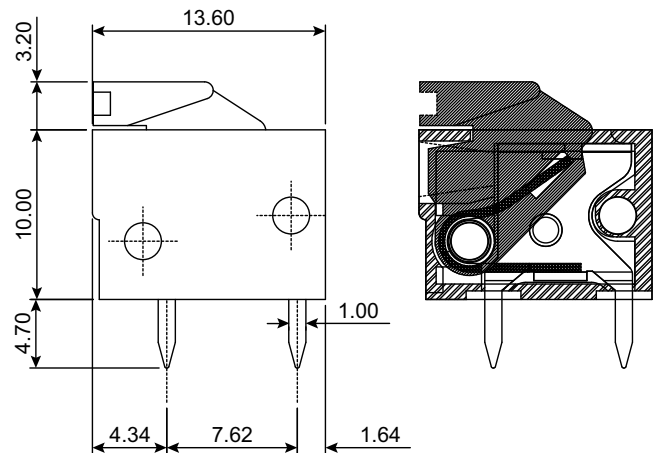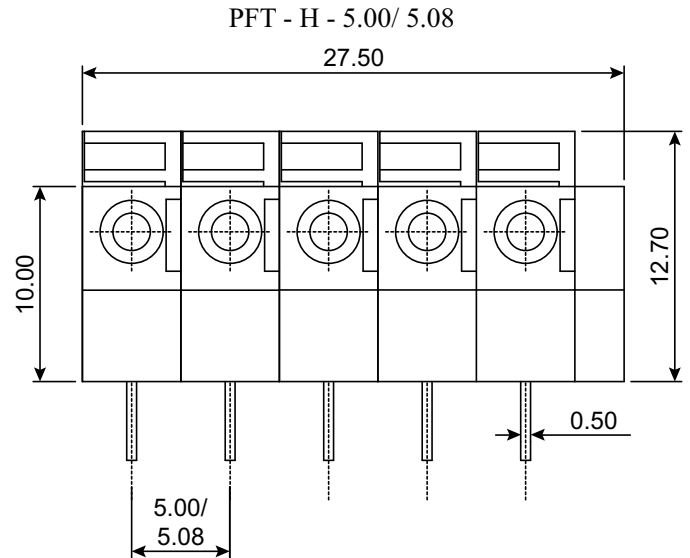

ORDERING CODE

Series	Poles	Pitch
--------	-------	-------

PFT H/n-5.08

Where n = number of poles

Approval Data

CE :10A / 250V / 26-12 AWG

Off/Works: 830/2, GIDC Estate, Makarpura, Vadodara- 390010

Office: +91 - 9227979802 / 4

Sales: +91-9227979801

Email: sales@vitalelectrocomp.com

Web: www.vitalelectrocomp.com

Note: Technical specifications are subject to change without prior notice

Copyright© 2024 by Vital Electrocomp. All Rights Reserved