



TM

VITAL


Electrocomp



Google Us : Vital Connectors

Manufacturer of PCB Terminal Blocks, Fuse Holders, Barrier Terminals, & Switches

RM2.5CU

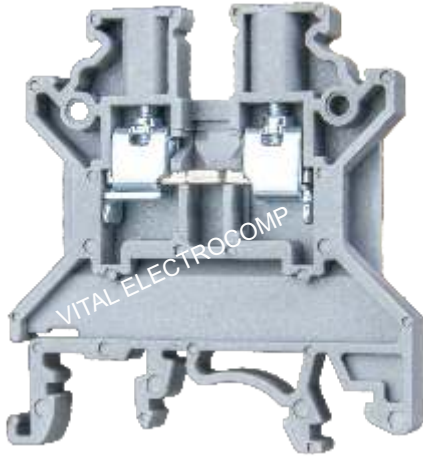

Vital make RM2.5CU is a screw operated, 2.5 mm² feed through DIN-Rail Mounted terminal block, resourceful in wire management application, having good conductivity, High reliability, with our Flexible configuration provide ease of installation and use.

PRODUCT INFORMATION :

Product name:	RM2.5CU
Connection method:	Feed through, screw connection type.
Rating:	24 A / 800 V / 2.5 sq mm / 0.5 Nm
HSN number:	85369090
Standard packing quantity:	100 NOS
Country of origin:	INDIA
Screw thread:	M2.5

TECHNICAL DATA:

DIMENSIONS

Height:	44 mm	1.732 inch
Width:	43 mm	1.692 inch
Thickness:	5 mm	0.196 inch
Screw size:	M2.5	
Standard wire size:	2.5 sq mm	
Channel size:	DRC15, DRC35	

*Continue

Off/Works: 830/2, GIDC Estate, Makarpura, Vadodara- 390010

Office: +91 - 9227979802 / 4 | Sales: +91-9227979801

Email: sales@vitalelectrocomp.com | Web: www.vitalelectrocomp.com

Note: Technical specifications are subject to change without prior notice

Copyright© 2024 by Vital Electrocomp. All Rights Reserved



Manufacturer of PCB Terminal Blocks, Fuse Holders, Barrier Terminals, & Switches

RM2.5CU

MATERIAL

Body material:	POLYAMIDE 6.6
Standard colour:	Grey
Colour options:	Red, Yellow, Blue, Black, Green, Charcoal

IEC RATING

Connection in acc with standard	IEC 60947-7-1
Nominal Voltage	1000 V
Nominal current	24 A
Nominal cross section	2.5 sq mm
Short time current:	0.3 kA
Rated surge voltage:	8 kV
Degree of pollution:	3

Off/Works: 830/2, GIDC Estate, Makarpura, Vadodara- 390010

Office: +91 - 9227979802 / 4 | Sales: +91-9227979801

Email: sales@vitalelectrocomp.com | Web: www.vitalelectrocomp.com

Note: Technical specifications are subject to change without prior notice

Copyright© 2024 by Vital Electrocomp. All Rights Reserved