




Manufacturer of PCB Terminal Blocks, Fuse Holders, Barrier Terminals, & Switches

RM2.5U

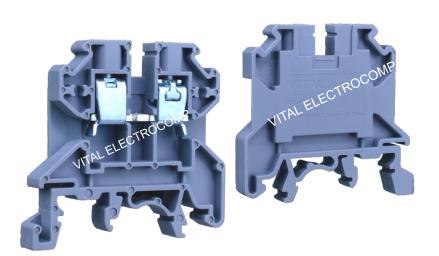

Vital make RM2.5U is a screw driver operated Feed-Through terminal block. Its specially designed foot enables easy mounting and removal from the stack with a screw driver. There is a slot on the terminals to hold markers for identification. Cross connection can be achieved by shorting links. These terminals are ideal for automation, instrumentation, power and control applications.

PRODUCT INFORMATION:

Product name:	RM2.5U
Connection method:	Feed through, screw connection type.
Rating:	24 A / 1000 V / 2.5 sq mm / 0.5 Nm
HSN number:	85369090
Standard packing quantity:	100 NOS
Country of origin:	INDIA
Screw thread:	M3

TECHNICAL DATA:

DIMENSIONS

Height:	41.30 mm	1.62 inch	
Width:	43.75 mm	1.72 inch	
Thickness:	6 mm	0.23 inch	
Screw size:	М3		
Standard wire size:	2.5 sq mm		
Channel size:	DRC15, DRC35		

*Continue

Off/Works: 830/2, GIDC Estate, Makarpura, Vadodara-390010

Office: +91 - 9227979802 / 4 | Sales: +91-9227979801

Email: sales@vitalelectrocomp.com | Web: www.vitalelectrocomp.com

Note: Technical specifications are subject to change without prior notice | Copyright© 2024 by Vital Electrocomp. All Rights Reserved





Manufacturer of PCB Terminal Blocks, Fuse Holders, Barrier Terminals, & Switches

RM2.5U

MATERIAL

Body material:	POLYAMIDE 66	
Standard colour:	Grey	
Colour options:	Red, Yellow, Blue, Black, Green, Charcoal	

IEC RATING

Connection in acc with standard	IEC 60947-7-1
Nominal Voltage	1000 V
Nominal current	24 A
Nominal cross section	2.5 sq mm
Short time current:	0.3 kA
Rated surge voltage:	8 kV
Degree of pollution:	3

Off/Works: 830/2, GIDC Estate, Makarpura, Vadodara-390010

Office: +91 - 9227979802 / 4 | Sales: +91-9227979801

Email: sales@vitalelectrocomp.com | Web: www.vitalelectrocomp.com

Note: Technical specifications are subject to change without prior notice

Copyright© 2024 by Vital Electrocomp. All Rights Reserved