



TM

VITAL

Electrocomp



Google Us : Vital Connectors

Manufacturer of PCB Terminal Blocks, Fuse Holders, Barrier Terminals, & Switches


Series 762RA

[Model : 762RA/2, 762RA/3]


Screw Type(Cage-Clamp Design) Connectors



762RA/3


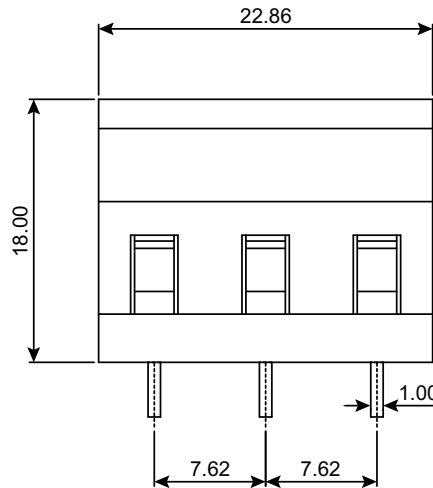


762RA/2

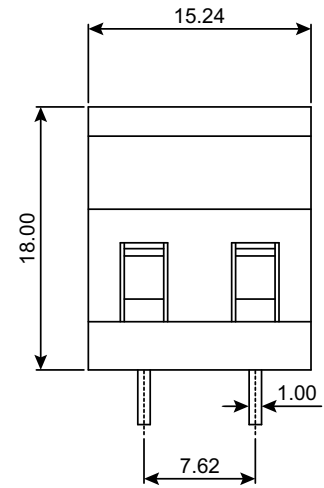

TECHNICAL SPECIFICATIONS :

Pitch	: 7.62 mm
Nominal Rating	: 15A/450V or 24A/300V
Dielectric Strength	: >2 kV
Moulded Material	: PA66 - UL94 V0 or V2
Insulation Resistance	: >1000 M Ω @ 500 Vdc
Terminal	: Tin Plated Copper Alloy
Wire Cage	: Nickel Plated Brass
Screw	: M3 x 0.50 mm
	: Brass Nickel Plated Suffix "P"
	: MS Trivalent Zinc Plated Suffix :C"
Wire Size	: 2.5 mm ²
Maximum Torque	: 0.50 - 0.60 Nm

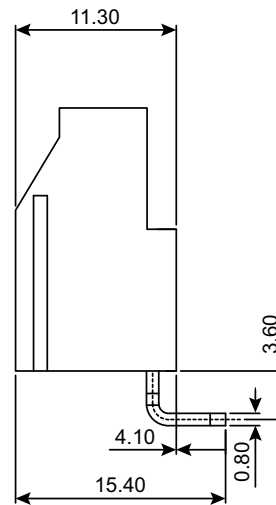

ORDERING CODE

Series	Poles	Grade
--------	-------	-------

→ 762RA/2 P ←

Number of Poles: 2 or 3

Grade: P or C

P= Professional Grade

C= Economy Grade

Approval Data

UL :300V / 20A / 26-12 AWG

cUL :300V / 20A / 26-12 AWG

CE :300V / 24A / 26-12 AWG

Off/Works: 830/2, GIDC Estate, Makarpura, Vadodara- 390010

Office: +91 - 9227979802 / 4

Sales: +91-9227979801

Email: sales@vitalelectrocomp.com

Web: www.vitalelectrocomp.com

Note: Technical specifications are subject to change without prior notice

Copyright© 2024 by Vital Electrocomp. All Rights Reserved