



TM

VITAL

Electrocomp



Google Us : Vital Connectors

Manufacturer of PCB Terminal Blocks, Fuse Holders, Barrier Terminals, & Switches

Pluggable Connectors


Series COM ST F [RSL]

RSL = Reverse Side Locking




Picture shows 2 & 8 pole version of the product

COM ST/3 F

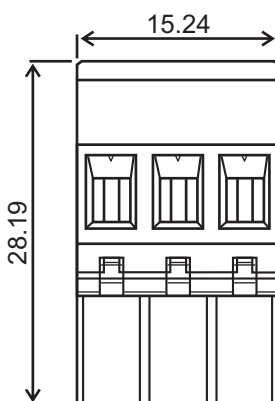


COM ST/2 F

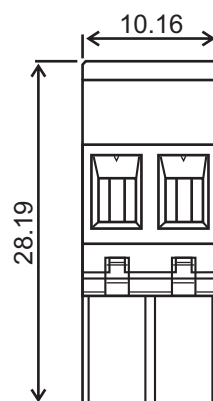

TECHNICAL SPECIFICATIONS :

Pitch	: 5.08 mm
Nominal Rating	: 15A/300V
Dielectric Strength	: >2 kV
Moulded Material	: Polyamide (Nylon)66 - UL94 V0 or V2
Insulation Resistance	: >1000 M Ω @ 500 Vdc
Terminal	: Tin Plated Copper Alloy
Wire Cage	: Brass Nickel Plated
Screw	: M3 x 0.50 mm
	: Brass Nickel Plated Suffix "P"
	: MS Trivalent Zinc Plated Suffix "C"
Wire Size	: 2.5 mm ²
Maximum Torque	: 0.50 - 0.60 Nm

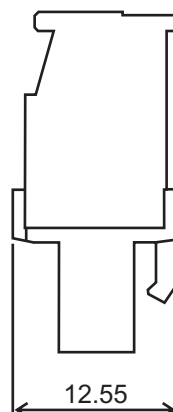

Approval Data

UL : 300V / 12A / 28-12 AWG
cUL : 300V / 12A / 28-12 AWG
CE : 300V / 15A / 28-12 AWG

ORDERING CODE

Series	Poles	Grade
--------	-------	-------

→ COM ST/n F P [RSL] ←

Number of Poles: 2 to 14

Grade: P or C

P = Professional Grade

C = Economy Grade

Off/Works: 830/2, GIDC Estate, Makarpura, Vadodara- 390010

Office: +91 - 9227979802 / 4 | Sales: +91-9227979801

Email: sales@vitalelectrocomp.com | Web: www.vitalelectrocomp.com

Note: Technical specifications are subject to change without prior notice

Copyright© 2024 by Vital Electrocomp. All Rights Reserved