



TM

# VITAL

Electrocomp



Google Us : Vital Connectors

Manufacturer of PCB Terminal Blocks, Fuse Holders, Barrier Terminals, & Switches




## Series 75RA MS

[Model : 75RA/2 MS, 75RA/3 MS]

Screw Type(Cage-Clamp Design) Connectors


75RA/3 MS

75RA/2 MS

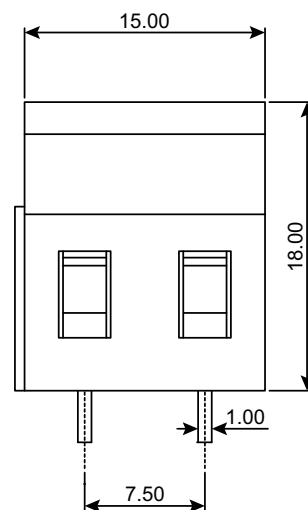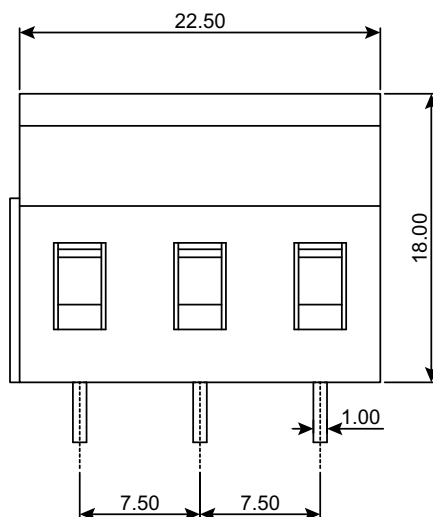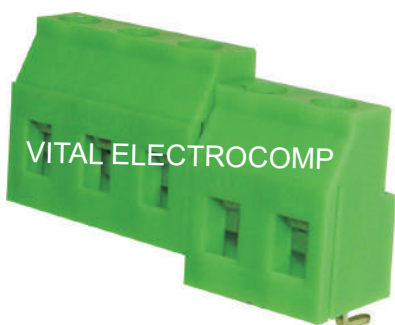

## TECHNICAL SPECIFICATIONS :

|                       |                                                |
|-----------------------|------------------------------------------------|
| Pitch                 | : 7.50 mm                                      |
| Nominal Rating        | : 10A/300V                                     |
| Rate Voltage          | : 300V                                         |
| Dielectric Strength   | : >2 kV                                        |
| Moulded Material      | : PA66                                         |
| Insulation Resistance | : >1000 M $\Omega$ @ 500 Vdc                   |
| Terminal              | : Tin Plated Copper Alloy                      |
| Wire Cage             | : Nickel Plated Brass                          |
| Screw                 | : M2.5 x 0.45 mm<br>: MS Trivalent Zinc Plated |
| Wire Size             | : 2.5 mm <sup>2</sup>                          |
| Maximum Torque        | : 0.2 - 0.25 Nm                                |

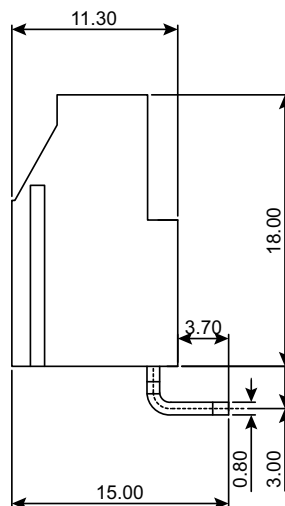

## Approval Data

CE :300V / 10A / 26-12 AWG

## ORDERING CODE

| Series | Poles | Grade |
|--------|-------|-------|
|--------|-------|-------|

→ 75RA/2 MS ←

Number of Poles: 2 or 3

Grade: MS

MS = Mild Steel

Off/Works: 830/2, GIDC Estate, Makarpura, Vadodara- 390010

Office: +91 - 9227979802 / 4

Sales: +91-9227979801

Email: sales@vitalelectrocomp.com

Web: www.vitalelectrocomp.com

Note: Technical specifications are subject to change without prior notice

Copyright© 2024 by Vital Electrocomp. All Rights Reserved