



TM


VITAL
Electrocomp

Google Us : Vital Connectors


Manufacturer of PCB Terminal Blocks, Fuse Holders, Barrier Terminals, & Switches

Series 762 MS*[Model : 762/2 MS, 762/3 MS]*


Screw Type(Cage-Clamp Design) Connectors

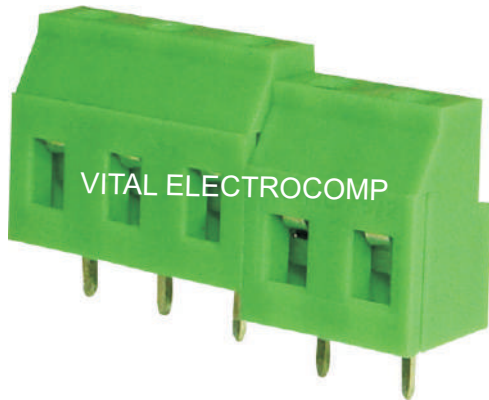


762/3 MS

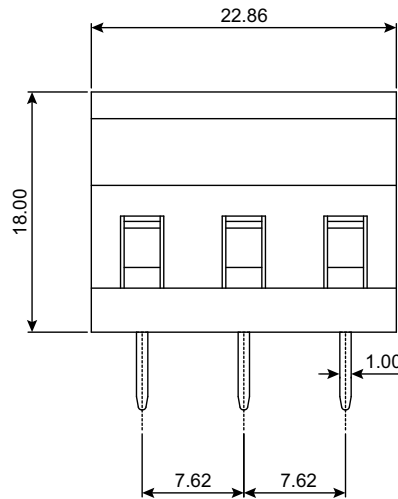

762/2 MS

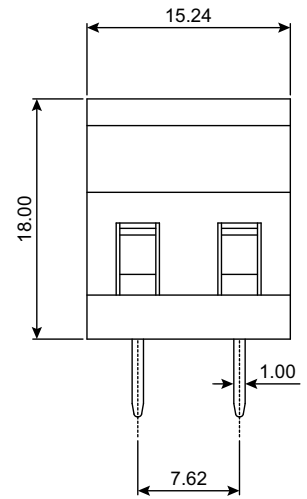**TECHNICAL SPECIFICATIONS :**

Pitch	: 7.50 mm
Nominal Rating	: 10A/300V
Rate Voltage	: 300V
Dielectric Strength	: >2 kV
Moulded Material	: PA66
Insulation Resistance	: >1000 M Ω @ 500 Vdc
Terminal	: Tin Plated Copper Alloy
Wire Cage	: Nickel Plated Brass
Screw	: M2.5 x 0.45 mm : MS Trivalent Zinc Plated
Wire Size	: 2.5 mm ²
Maximum Torque	: 0.2 - 0.25 Nm

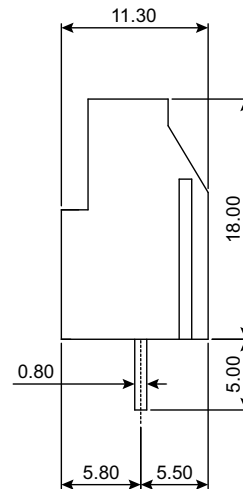**Approval Data**

CE :300V / 10A / 26-12 AWG

ORDERING CODE

Series	Poles	Grade
--------	-------	-------

→ 762/2 MS ←

Number of Poles: 2 or 3

Grade: MS

MS = Mild Steel

Off/Works: 830/2, GIDC Estate, Makarpura, Vadodara- 390010

Office: +91 - 9227979802 / 4

Sales: +91-9227979801

Email: sales@vitalelectrocomp.com

Web: www.vitalelectrocomp.com

Note: Technical specifications are subject to change without prior notice

Copyright© 2024 by Vital Electrocomp. All Rights Reserved