



TM

VITAL

Electrocomp






Google Us : Vital Connectors

Manufacturer of PCB Terminal Blocks, Fuse Holders, Barrier Terminals, & Switches

Fuse Holders

HFH1 / HFH5

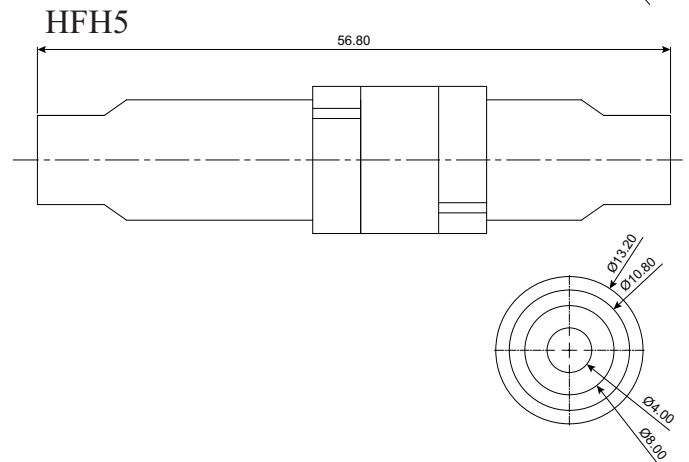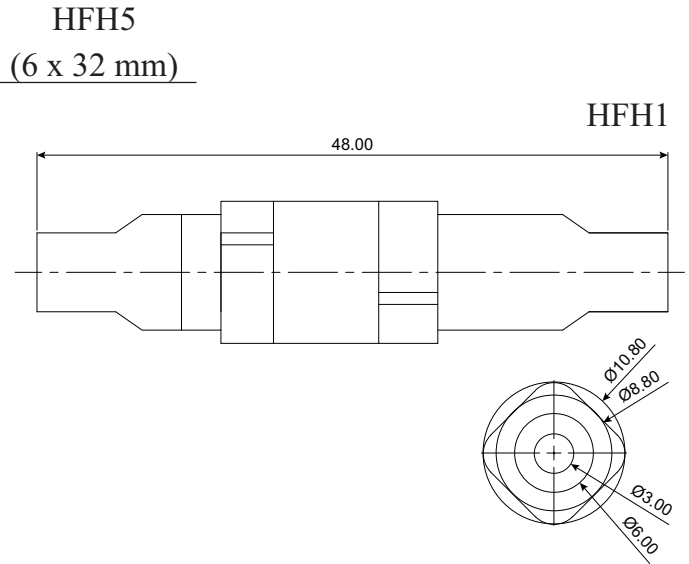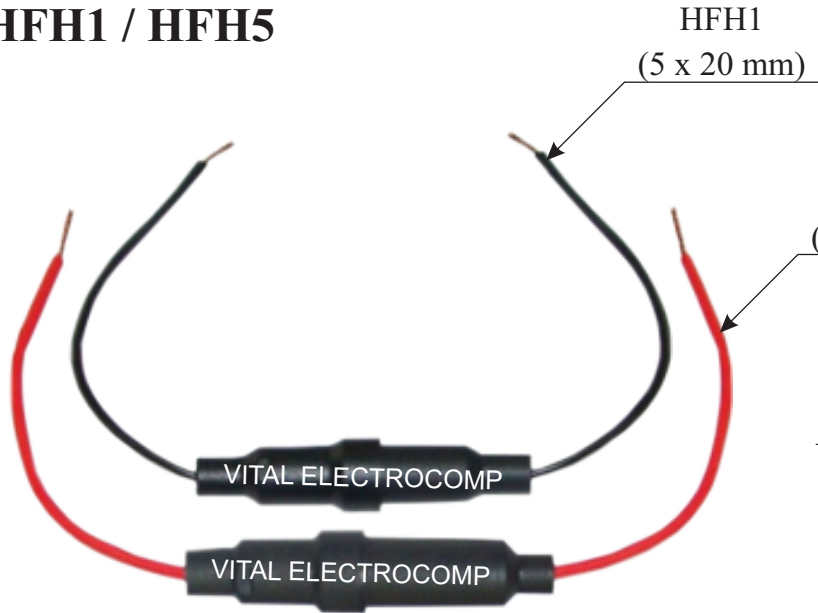

TECHNICAL SPECIFICATIONS :

Mounting Style	: PCB Type
Nominal Rating	: 6.30A/250V
Permissible Operating Temp	: -20°C to +85°C
Permissible Soldering Temp	: 270°C for 5 sec max
Dielectric Strength	: 2 kV for 1 min.
Moulded Material	: PA66 - UL94 V0 or V2
Insulation Resistance	: >1000 M Ω @ 500 Vdc
Contact Resistance	: 20 m Ω max
Terminal	: Tin Plated Copper Alloy
Wire Size	: 0.5 mm ² (Can be Customized)
Fuse Link for HFH1	: 5 x 20 mm
Fuse Link for HFH5	: 6 x 32 mm

Hanging Fuse Holders

HFH Series	Length (mm)	Diameter (mm)
HFH1	49.00	10.85
HFH5	56.50	13.25

**For Wire :- Size, Length, & Color
Can Be Customized**

Off/Works: 830/2, GIDC Estate, Makarpura, Vadodara- 390010

Office: +91 - 9227979802 / 4

Sales: +91-9227979801

Email: sales@vitalelectrocomp.com

Web: www.vitalelectrocomp.com

Note: Technical specifications are subject to change without prior notice

Copyright© 2024 by Vital Electrocomp. All Rights Reserved