



Manufacturer of PCB Terminal Blocks, Fuse Holders, Barrier Terminals, & Switches

Pluggable Connectors

Series 7COM ST [C] M




Picture shows 3 pole version of the product

22.84 X+7.60 1.00

TECHNICAL SPECIFICATIONS:

Pitch	: 7.62 mm
Nominal Rating	: 12A/300V
Dielectric Strength	: >2 kV
Moulded Material	: PA66 - UL94 V0 or V2
Insulation Resistance	: >1000 M Ω @ 500 Vdc
Terminal	: Tin Plated Copper Alloy

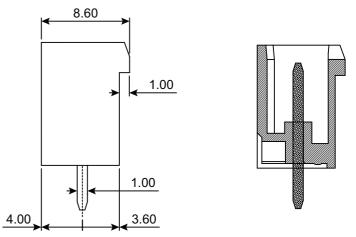

ORDERING CODE

Series Poles Grade

→7COM ST/n [C] M P←

n= Number of Poles: 2 to 4

Grade: P or C

P= Professional Grade C= Economy Grade

Approval Data

CE :12A / 300V

Off/Works: 830/2, GIDC Estate, Makarpura, Vadodara-390010

Office: +91 - 9227979802 / 4

Sales: +91-9227979801

Email: sales@vitalelectrocomp.com

Web: www.vitalelectrocomp.com

Note: Technical specifications are subject to change without prior notice

Copyright© 2024 by Vital Electrocomp. All Rights Reserved