



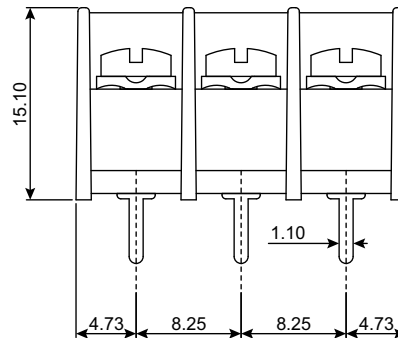
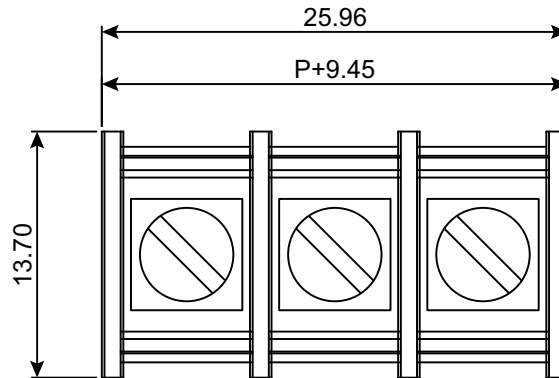


TM

VITAL
Electrocomp

Google Us : Vital Connectors

Manufacturer of PCB Terminal Blocks, Fuse Holders, Barrier Terminals, & Switches

Series VBT 825C**Back Wall****TECHNICAL SPECIFICATIONS :**

Rated Voltage	: 9.50 mm
Nominal Rating	: 25A/300V
Dielectric Strength	: >2kV
Moulded Material	: Polyamide (Nylon)PA66-UL94 V0 or V2
Insulation Resistance	: >1000 M Ω @ 500 Vdc
Terminal	: Tin Plated Copper Brass
Wire Cage	: Nickel Plated Brass
Screw	: M3.5 : Brass Nickel Plated Suffix "PC" : MS Trivalent Zinc Plated Suffix "C"
Wire Size	: 2.5 mm ²
Maximum Torque	: 0.30 - 0.4 Nm

Approval Data

UL :300V / 20A / 22-14 AWG

cUL :300V / 20A / 22-14 AWG

CE :300V / 25A / 22-14 AWG

ORDERING CODE

Series	Poles	Grade
--------	-------	-------

→ VBT 825C/2 P ←

Number of Poles: 2 & 12

Grade: P or C

P= Professional Grade

C= Economy Grade

Poles	2	3	4	5	6	7	8	9	10	11	12
L (mm)	17.70	25.95	34.20	42.45	50.70	58.95	67.20	75.45	83.70	91.95	100.20
S (mm)	8.25	16.50	24.75	33.00	41.25	49.50	57.75	66.00	74.25	82.50	90.75

Off/Works: 830/2, GIDC Estate, Makarpura, Vadodara- 390010

Office: +91 - 9227979802 / 4

Sales: +91-9227979801

Email: sales@vitalelectrocomp.com

Web: www.vitalelectrocomp.com

Note: Technical specifications are subject to change without prior notice

Copyright© 2024 by Vital Electrocomp. All Rights Reserved