



TM

# VITAL


Electrocomp



Google Us : Vital Connectors

Manufacturer of PCB Terminal Blocks, Fuse Holders, Barrier Terminals, & Switches

## MUT4

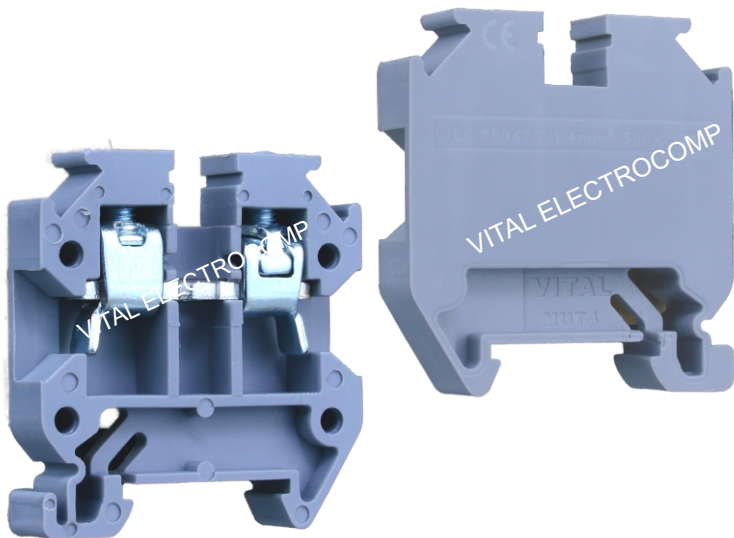

Vital make MUT4 is a screw driver operated Feed-Through terminal block. Its specially designed foot enables easy mounting and removal from the stack with a screw driver. There is a slot on the terminals to hold markers for identification. Cross connection can be achieved by shorting links. These terminals are ideal for automation, instrumentation, power and control applications.

## PRODUCT INFORMATION :

Product name:	MUT4
Connection method:	Feed through, screw connection type.
Rating:	32 A / 500 V / 4 sq mm / 0.5 Nm
HSN number:	85369090
Standard packing quantity:	100 NOS
Country of origin:	INDIA
Screw thread:	M3

## TECHNICAL DATA:

### DIMENSIONS

Height:	29.7 mm	
	1.16 inch	
Width:	28.5 mm	1.12 inch
Thickness:	6 mm	0.23 inch
Screw size:	M3	
Standard wire size:	4 sq mm	
Channel size:	DRC15	

\*Continue

Off/Works: 830/2, GIDC Estate, Makarpura, Vadodara- 390010

Office: +91 - 9227979802 / 4

Sales: +91-9227979801

Email: sales@vitalelectrocomp.com

Web: www.vitalelectrocomp.com

Note: Technical specifications are subject to change without prior notice

Copyright© 2024 by Vital Electrocomp. All Rights Reserved



Manufacturer of PCB Terminal Blocks, Fuse Holders, Barrier Terminals, & Switches

## MUT4

### MATERIAL

Body material:	POLYAMIDE 66
Standard colour:	Grey
Colour options:	Red, Yellow, Blue, Black, Green, Charcoal

### IEC RATING

Connection in acc with standard	IEC 60947-7-1
Nominal Voltage	500 V
Nominal current	32 A
Nominal cross section	4 sq mm
Short time current:	0.48 kA
Rated surge voltage:	4 kV
Degree of pollution:	3

Off/Works: 830/2, GIDC Estate, Makarpura, Vadodara- 390010

Office: +91 - 9227979802 / 4 | Sales: +91-9227979801

Email: sales@vitalelectrocomp.com | Web: www.vitalelectrocomp.com

Note: Technical specifications are subject to change without prior notice

Copyright© 2024 by Vital Electrocomp. All Rights Reserved